

Pick the Type First

@jeffrey · Aesthetic.Computer · ORCID 0009-0007-4460-4913

October 30, 2026 · d23575e7d3

Index

1. Introduction 4

2. Context 6

3. The factory 8

    3.1 A harness is a folder 8

    3.2 The goal decides 8

    3.3 Three routes to bytes 10

    3.4 Checks and one repair 11

    3.5 Runs are kept 12

4. Hosted bounds 14

5. Evidence 16

    5.1 Live runs 16

    5.2 What the runs show 18

6. The workshop 22

7. Limitations and ethics 24

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=2

8. Conclusion 27

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=3

1. Introduction

Ask a room of art students what an AI agent is and you get a cloud. Ask them what it is *making* and the cloud gets a shape. A poster. A sound. A web page. That shape has a standard name already: a MIME type [Freed and Borenstein, 1996a,b].

Aesel is built on that. Its terminal shows the media a session is working on: a module reads the paths in each tool call, keeps the ones that are real files of a kind a card can show — `image/png`, `audio/wav`, `video/mp4`, `application/pdf` and seven other types — and puts the freshest first, so the preview turns to what was just written (`aesel/src/media.mjs`). Its companion, mime.ac, files everything people post into boards by MIME type [@jeffrey, 2026b]. The type is the shape of the work in both places.

A harness is everything around a model that lets it act. Aesel's own is large: sectioned prompts, guardrails, tool guidance, a verify loop, and a refinement method borrowed from Harness^2 [Xu et al., 2026, @jeffrey, 2026c]. That is too much to

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=4

teach in an afternoon. The harness factory keeps the shape and drops the size. It has four parts, inputs, a written prompt, a model and checks, aimed at one MIME type. Choosing that type comes first, and it sets most of what follows.

This report describes the factory as committed at `d23575e7d3` (October 30, 2026), the runs made with it that day, and the workshop it was built for. The commit is evidence. The classroom is still a plan.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=5

2. Context

Harnesses, not weights. Harness[2] [Xu et al., 2026] improves an agent by editing its harness. Twelve days before this commit, that method was carried over to Aesel [@jeffrey, 2026c,a]: the prompt moved into named markdown sections, a runner played every save in a headless browser, and a refinement loop proposed edits. The factory is the same idea for beginners. The editable part is one file, `prompt.md`, and the loop is a person reading `runs/`.

Formats as culture. Sterne reads the MP3 as a cultural object that encodes assumptions about listening [Sterne, 2012]. Menkman reads file formats as having vernaculars of their own [Menkman, 2010]. Keymaps as Social Software, written for the same UCLA program, treated a keyboard layout as a score that people share and version [@jeffrey, 2026d]. The factory comes at it from the other side: a format can be picked *first*, as the constraint a whole tool is designed around.

The room. The workshop is written for UCLA

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=6

Design Media Arts, where the Social Software initiative [McCarthy and Reas, 2026] ran its second cycle, *Scores for Social Software* [Reas, 2026], in spring 2026. The published sub-platter for that cycle [@jeffrey, 2026f] gathers its paper, edition and documentation. Its lesson for this one is practical: students there wrote scores, instructions for other people to perform. A `prompt.md` is a score for a model.

Low floor, wide walls. Resnick and Silverman ask construction kits for a low floor, a high ceiling and wide walls [Resnick and Silverman, 2005], after Papert [Papert, 1980]. Here the floor is one command from a starter. The walls are the 3 input forms $\times$ 10 output goals. The ceiling is the fact that Aesel's own harness has the same shape at a much larger size.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=7

3. The factory

3.1 A harness is a folder

```
my-harness/
  harness.json  {"name","inputs":["text","image"],
                 "output":"image/svg+xml","model"?}
  prompt.md     what it knows, how it decides
  check.mjs     optional: (output) => [problems]
  runs/         every run, kept
```

Inputs come in three forms: `text` on the command line, `image` (any picture file, sent as a PNG) and `file` (a text file up to 64 KB, read in as words). A harness refuses a form its manifest did not name, so that a run means what `harness.json` says. The model defaults to hosted Claude Sonnet 5.5; `--model` swaps it. Four commands drive it: `ac harness list`, `new`, `run` and `post` (`aesel/src/harness-cli.mjs`, 116 lines; the factory itself is `harness-factory.mjs`, 337).

3.2 The goal decides

Table 1 is the `OUTPUTS` registry, close to verbatim. One line per MIME type. Each line fixes the extension, the contract appended to the student's prompt, the checks a result must pass, and how

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=8

Goal	Ext	Route	Built-in check
`text/plain`	txt	answer	not empty
`text/markdown`	md	answer	not empty
`text/csv`	csv	answer	not empty
`application/json`	json	answer	parses
`text/html`	html	answer	has an `<html>` element
`image/svg+xml`	svg	answer	one complete `<svg>…</svg>`
`text/x-lisp`	lisp	answer	parentheses balance
`text/javascript`	mjs	answer	source checks; no imports; exports `paint`
`image/png`	png	**art-direct**	prompt under 16,000 chars
`audio/wav`	wav	**score**	bpm 20–300; real pitches; $\leq$60 s

Table 1: The ten output goals. *Answer*: the model's fenced block is the file. *Art-direct*: the block is a prompt sent to a hosted image model. *Score*: the block is JSON this machine synthesizes. A `check.mjs` adds its own problems after the built-in ones pass.

the answer becomes bytes. A student who writes `--out wav` has chosen all of that in one word.

The seam is visible. `ac harness run --dry` prints exactly what would be sent and spends nothing. For the poster starter:

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=9

````
# Poster
You design one Swiss-style typographic poster
for the event you're given.
- Canvas: viewBox="0 0 600 900".
- ...
- Use only generic font families
  (sans-serif, serif, monospace).
---
Output goal: image/svg+xml (picture).
Answer with one standalone SVG document (with
xmlns and a viewBox) inside one ```svg block.
No external images or fonts.
--- user ---
late night jazz at the planetarium, nov 14
````

Everything above the rule is the student's. Everything below it is the type's. The workshop teaches that line: you write taste and judgement, and the factory adds the format.

3.3 Three routes to bytes

Eight goals are text, and the model writes the file. The other two are the lesson inside the lesson (Figure 1). A language model emits tokens. It cannot emit a PNG's pixels or a WAV's samples. So the harness picks an intermediate form the model *can* write, and something else turns it into the media.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=10

For `image/png` the model is the art director. Its contract asks for *subject, composition, medium, palette, light and mood in concrete words*, under 1,500 characters, and the hosted image model paints it. If a photo came in, it goes along as a reference. For `audio/wav` the model is the composer. It writes `{"bpm", "notes": [{"at", "beats", "pitch", "wave", "gain"}]}`, and `wav-score.mjs` sings it. That file has one voice per note, five waveforms (sine, square, saw, triangle, noise), a short attack and release against clicks, and a `tanh` soft clip into 16-bit mono at 22,050 Hz. It has no dependencies, so a workshop laptop needs nothing new. The synth is plain on purpose. The score carries the music.

3.4 Checks and one repair

A check is how a harness gets stricter without retraining anything. After the model answers, the fenced block is pulled out (or the whole answer, when the fence was forgotten). The type's built-in checks run, then the harness's own `check.mjs`. If either returns problems, they go back to the model as a list, and it gets one try to send the

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=11

whole answer again. The terminal shows `repairing:` with the first problem. Two rounds is the hard limit. The haiku starter's check is the whole idea in four lines:

```
export default function check({ text }) {
  const lines = text.split("\n").filter((l) => l.trim());
  return lines.length === 3 ? []
    : [`A haiku has 3 lines; this has ${lines.length}.`];
}
```

3.5 Runs are kept

Every run writes a timestamped folder: `answer.md` (the model's full reply), `run.json` (inputs, model, rounds, problems, token usage) and, when it passed, `output.<ext>`. Image runs also keep `prompt.txt`, and sound runs keep `score.json`. The intermediate form is saved next to what it became. Comparing two `runs/` folders after changing one line of `prompt.md` is the workshop's main move. `ac harness post` sends the newest file to mime.ac as the signed-in handle, and it lands on the board for its type.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=12

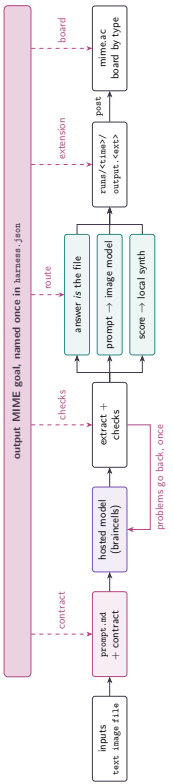


Figure 1: One run of a factory harness, read bottom to top. The MIME goal (pink banner) sets the contract, checks, route, extension and board.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=13

4. Hosted bounds

Inference is Aesthetic.Computer's own hosted endpoint, paid in braincells by the handle that runs it [@jeffrey, 2026e]. Nothing else needs installing, and no student needs an API key. The endpoint sets the edges of the factory:

- **Words and PNGs only.** The server refuses documents, audio, video and image URLs. An image must be a static base64 PNG, at most 768×768, at most 700,000 base64 characters, and at most 16 per request (`system/backend/easel-input-images.mjs`). Audio, video and PDFs cannot go *in* yet. A `file` input is text.
- **Billing.** Every model is billed in braincells against a daily allowance that resets at midnight UTC; an exhausted handle gets a 429 with its count (`easel-policy.mjs`).
- **Five pictures a day.** Hosted image generation is capped at five per handle per day (`easel-image.mjs`). This is the one goal a student should choose knowingly.
- **8,000 output tokens** per request, set by the

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=14

factory.

Two fixes came from the first live runs. **One retry.** The lab Wi-Fi reset connections. A request that never got an answer is now tried once more after 1.5 s. An HTTP error is not retried, because it already has a reason. **Shrink to fit.** A textured photograph at 768 px can encode past the 700,000-character cap. Pictures are now box-filtered and re-encoded at 80% of the previous side until the PNG is under 500 KB, giving up below 64 px. The factory decodes plain 8-bit PNGs itself and sends everything else (JPEG, HEIC, WebP, 16-bit or palette PNG) through macOS's `sips` first.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=15

Starter	In → out
poster	text → `image/svg+xml`
hum	text → `audio/wav`
haiku-cam	image + text → `text/plain`
kidlisp	text → `text/x-lisp`

Table 2: The four live runs, one each, from their `run.json`. *Out tok* is the output tokens billed, and *Think* is the part of those spent thinking. Inputs were 253, 354, 704 and 365 tokens. The poster took about 24 s. The `image/png` starter was not run, to spare the five-a-day cap.

5. Evidence

5.1 Live runs

On October 30, 2026, four starters ran against hosted Claude Sonnet 5.5, signed in as @jeffrey (Table 2). Each passed its checks on the first round. The run records are the source for every number below. None of the four outputs was posted.

Poster. Input: *late night jazz at the planetarium, nov 14*. The answer is a 2.1 KB SVG: navy

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=16

field, an amber planet with a tilted orbit, a giant *14*, and two four-column rows of small type on a grid (Figure 2, left).

Haiku cam. Input: the Aesel pencil drawing of a donkey at an easel, plus the words *quiet studio*. Output:

> *the pink heart still wet*
> *behind him, a door creaks wide*
> *someone holds their breath*

It is 5/7/5, it names one concrete thing in the picture (the heart on the canvas), and it leans past the frame, which is what the prompt asked. The check confirmed only that it has three lines.

Hum. Input: *the walk home after the first rain in LA*. The model wrote 91 notes at 84 bpm over 48 beats: a triangle melody built from one three-note motif, sine pads, a saw bass and twenty noise hits (Figure 3). The synth rendered 34.5 s (1,523,070 bytes). The score is 5.8 KB of JSON and cost 3,573 visible output tokens.

KidLisp. Input: *fireflies over a dark pond*. One round:

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=17

```
(wipe "black")
(ink "navy")
(box 0 (/ height 2) width (/ height 2))
(wiggle 6)
(ink "yellow")
(circle (+ 60 (* 20 (sin (/ frame 20)))) (/ height 4) 3)
...                  ; 12 lines in all, four colours
```

5.2 What the runs show

The intermediate form works on the first try. The two goals the model cannot reach directly are the ones this paper is about. The sound route passed its checks first time, with a score that reads as music on paper (Figure 3). The picture route was exercised only by the test suite this time, with an injected painter.

A rule without a check is a suggestion. The poster prompt says *use only generic font families.* The SVG set `"Helvetica, Arial, sans-serif"`, with a generic family only as the fallback. The KidLisp prompt says *under 12 lines*, and the piece has exactly 12. Neither broke anything, and no check caught either. That is the workshop's 1:10 step in one example. If a rule matters, write it as a check and the model gets one

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=18

chance to meet it.

The score is verbose. A JSON note costs about 39 output tokens. Under the 8,000-token cap, minus thinking, a score tops out around 150 notes, far below the synth's 2,000. Most students will hit the 60-second limit before the note limit, but a dense drum part would hit the token limit first.

The tests. `aesel/test/harness-factory.test.mjs` has 12 tests, and all 12 pass. They cover starters as valid harnesses, refused inputs, image bounding (1600×800 in, 768×384 out), the prompt seam, per-type checks, one repair round, a score to a valid RIFF/WAVE, an art-directed prompt passed to an injected painter, and a failed run that keeps its answer and writes no file. Inference and painting are injected there, so the suite spends nothing.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=19





the pink heart still wet
behind him, a door creaks wide
someone holds their breath

Figure 2: Left: the poster run's SVG, rasterized at 1200×1800 with no edits. Right: the haiku-cam input image (Aesel's pencil donkey) and the haiku the run wrote from it. Both were made in one round.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=20

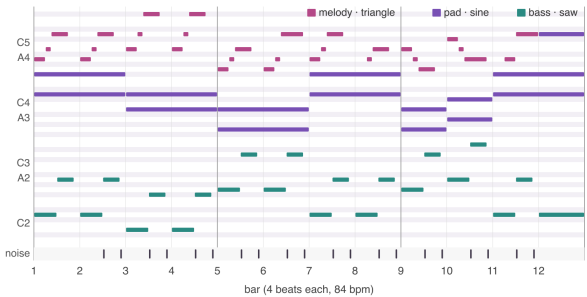


Figure 3: The JSON score the `hum` run wrote, drawn as a piano roll from its `score.json` (`figures/roll.mjs`). Twelve bars at 84 bpm. The melody repeats a three-note figure and shifts it, the pads hold chords, the bass moves in octaves, and the noise lane is a light off-beat pulse. That follows the starter's prompt: *repeat a motif, then change it once.* The local synth turned these 91 notes into a 34.5 s WAV.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=21

6. The workshop

`aesel/workshop/README.md` is the route. `guide.html` is the same route as a page to put on the projector. The goal is that by minute 90 every person has written a harness, run it, changed it after watching it fail, and posted what it made under their own handle (Table 3).

The route ends on mime.ac on purpose. Because posts are filed by type, the class's SVGs land together and the WAVs land together. Thirty harnesses built on one decision get shown grouped by that decision. Walking the boards is the critique.

The README also tells the instructor what to check before class: claimed handles, a braincell allowance covering about twenty Sonnet runs per person, the five-image cap, the room's Wi-Fi, and a folder of spare photos. Its *Going further* section points up the ceiling. Students can try a cheaper model on the same harness, pick another image model, fork a classmate's folder in git, or open Aesel's own `harness/*.md` to see the same shape at full size.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=22

Min	Step
0	Install Aesel, `ac login`, `ac whoami`
10	Run someone else's harness: everyone runs `poster` on their own event; three go on the projector. Why do they differ?
20	Read it: `--dry` shows the seam between `prompt.md` and the contract
30	Change one thing in `prompt.md`; compare two `runs/` folders; swap with a partner
45	Make your own: pick an input × output pair no starter does; run it, then try to break it
70	Add a `check.mjs`; watch `repairing:`
80	`ac harness post`; walk the mime.ac boards by type

Table 3: The 90-minute route. Six starters cover the space: `haiku-cam` (image + text → text, with a check), `poster` (text → SVG), `zine` (text + image + file → HTML), `hum` (text → WAV), `kidlisp` (text → KidLisp) and `sticker` (text + image → PNG).

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=23

7. Limitations and ethics

It has not been taught. Everything above is a system and four runs by its author. No student has installed it, run out of time at minute 45, or picked a pair the factory handles badly. Whether 90 minutes is enough is unknown. The route is a plan, and this paper does not claim it works in a room.

Planned evaluation. After the first session we will collect, with consent, each harness folder and its `runs/`. That gives a direct count of who reached each step (ran a starter, edited a prompt, made a new harness, added a check, posted) and how many runs and repairs each took. We will also ask one open question at the end: *what does the MIME type decide?* We will compare the answers with the thesis here. The posts on mime.ac are a public record of the output, but they do not show what anyone learned.

One run each. Every result in Table 2 is a single sample from one model. First-round passes say the contracts are clear enough for Sonnet 5.5. They say nothing about a cheaper model, which

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=24

the README invites students to try.

Checks are shallow. Built-in checks test form: the JSON parses, the SVG closes, the parentheses balance. A poster can pass and be ugly, and a score can pass and be tuneless. Judgement stays with the student, which is intended, but the word *passed* should not be read as *good*.

Platform catch. Only macOS converts JPEG and HEIC. On Windows and Linux an image input must already be an 8-bit PNG, and the error says so. A mixed-laptop classroom will hit this.

Small debris. A run folder is made before the request goes out, so a request that throws (a dropped connection, an oversized image) leaves an empty folder in `runs/`. The workspace behind this paper has seven of them from the attempts that preceded the two fixes. `post` skips them, but a student comparing runs will see them.

Consent and cost. Every input, including a student's photo, goes to the inference vendor, as in ordinary hosted use. Posting is public and signed with the handle, and it happens only when the student runs `post`. Inference is paid from

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=25

the student's braincells, so a classroom depends on that allowance or a top-up. No student data was used here. The image in Figure 2 is Aesthetic.Computer's own artwork.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=26

8. Conclusion

A harness is inputs, a written prompt, a model and checks, aimed at one kind of media. Name the kind and most of the rest follows: the format the model must answer in, what counts as a broken answer, the file it becomes, and where it gets shown. When the kind is out of the model's reach, the harness finds a form the model can write and lets something else make the bytes. An art director and a painter. A composer and a synth.

That is small enough to teach in an afternoon, and the same shape as the agent tools students already use. The code is done and four runs worked on the first try. The classroom is the next step, and it is the real test.

Platter consulted. `papers/SCORE.md`; the public Platter index and the `sosoft-cycle2` sub-platter; *Edit the Harness, Not the Model*, *Keymaps as Social Software*, *Shipping the Easel* and their bibliographies; Aesel at `d23575e7d3` (`harness-factory.mjs`, `harness-cli.mjs`, `wav-score.mjs`, `media.mjs`, `mime.mjs`, the workshop and its tests); `MIME.md`, `easel-input-images.mjs`, `easel-policy.mjs`, `easel-image.mjs`; and the four run folders.

https://papers.aesthetic.computer/pick-the-type-first-26-arxiv-cards.pdf#page=27

References

Ned Freed and Nathaniel S. Borenstein. Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies. RFC 2045, Internet Engineering Task Force, 1996a. URL https://www.rfc-editor.org/rfc/rfc2045.

Ned Freed and Nathaniel S. Borenstein. Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types. RFC 2046, Internet Engineering Task Force, 1996b. URL https://www.rfc-editor.org/rfc/rfc2046.

@jeffrey. Harness^2 for Aesel and its Embeddings. aesel/docs/harness2.md in the Aesthetic.Computer repository, 2026a. URL https://aesthetic.computer.

@jeffrey. Mime. system/backend/MIME.md in the Aesthetic.Computer repository; served at mime.ac, 2026b. URL https://mime.ac.

@jeffrey. Edit the Harness, Not the Model: Carrying Harness^2 over to Aesel, a piece-writing agent, in one day. Aesthetic.Computer

papers, field report, October 18, 2026c. URL https://papers.aesthetic.computer/edit-the-harness-26-arxiv.pdf.

@jeffrey. Keymaps as Social Software: Versioned Virtual Objects via Social Contract. Aesthetic.Computer papers; first print edition of 64 for Scores for Social Software, UCLA, 2026d. URL https://papers.aesthetic.computer/keymaps-social-software-26-arxiv.pdf.

@jeffrey. Paying for Strangers. Aesthetic.Computer papers, field report, 2026e. URL https://papers.aesthetic.computer/paying-for-strangers-26-arxiv.pdf.

@jeffrey. Scores for Social Software, Cycle 2: Platter. Aesthetic.Computer papers, subplatter, 2026f. URL https://papers.aesthetic.computer/platter/sosoft-cycle2/.

Lauren Lee McCarthy and Casey Reas. Social Software. Initiative at UCLA Design Media Arts, 2026. URL https://sosoft.arts.ucla.edu/info.

Rosa Menkman. A Vernacular of File Formats: A Guide to Database Compression Design. Self-published, Amsterdam, 2010. URL https://papers.aesthetic.computer/menkman-vernacular-of-file-formats-2010.pdf.

Seymour Papert. *Mindstorms: Children, Computers, and Powerful Ideas*. Basic Books, 1980.

Casey Reas. Cycle 2: Scores for Social Software. Ten-week working group, UCLA Social Software, April–June, 2026. URL https://sosoft.arts.ucla.edu/featured/cycle-2.

Mitchel Resnick and Brian Silverman. Some reflections on designing construction kits for kids. In *Proceedings of the 2005 Conference on Interaction Design and Children*, pages 117–122. ACM, 2005.

Jonathan Sterne. *MP3: The Meaning of a Format*. Duke University Press, 2012.

Ruiyao Xu, Yanfei Chen, Zhongying CuiZhu, Bhavana Dalvi Mishra, Yifei Ming, Han Yu, Rujun Han, Chen-Yu Lee, and Tomas Pfister.

Harness^2: Recursive Agent Harnessing for an Open World. arXiv preprint arXiv:2610.14224, 2026. URL https://arxiv.org/abs/2610.14224.



Source bundle

The attached ZIP contains the paper's machine-readable text sources and a plain-text inventory. It supports accessibility, audit, quotation, and reproducible editing; the PDF remains the canonical reading edition. Private evidence, credentials, raw datasets, generated PDFs, and unlisted assets are excluded.